



21 SERIES VALVES



PRODUCT CATALOG

Inline Poppet Valves 21 Series – Valves with Quick Disconnect Coils

Product Overview

Directional Control Function

Directional control valves function to control the direction of flow in the pneumatic circuit. Directional control valves are able to control the way the air passes. These valves can regulate the airflow being capable to stop fluid flow, allow fluid flow, and change the direction of fluid flow. These three functions usually operate in combination.

Solenoid Pilot Controlled			Pressure Controlled
DIN EN 175301-803	M12	1/2" Conduit with Leads	
			

Illustration examples.

VALVE FEATURES

Perpendicular Poppet Face Seals	Creates High-Flow and Positive Sealing
Differential Piston Design	Delivers Fast and Consistent Response Times
Overwhelming Shifting Forces	Provides No-Stick Operation
High Velocity Air Flow Across Poppet Seats	Allows Self-Cleaning and Strong Dirt Tolerance
Superior Internal Guidance System and Self-Compensating Seals	Delivers Long-Life

For Explosion-Proof solenoid pilot valves, see valves for Hazardous Locations.



Valves with classic heavy-duty solenoid pilot also available.

PRODUCT CREDENTIALS

Safety Integrity Level	Declaration of Conformity		Certificate of Compliance
			

Actuation	Available Inlet Port Sizes							Functions			Maximum Flow C _v (NI/min)	Page
	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2/2	3/2	4/2		
Solenoid Pilot Controlled	●	●	●	●	●	●	●	●	●	●	33 (32000)	3 – 9
Pressure Controlled	●	●	●	●	●	●	●	●	●	●	33 (32000)	10 – 15
Accessories												16 – 18

STANDARD SPECIFICATIONS							
GENERAL	Function		2/2 Valve	Normally Closed			
				Normally Open			
			3/2 Valve	Normally Closed			
				Normally Open			
			4/2 Valve				
	Construction Design		Poppet				
	Actuation		Electrical	Solenoid Pilot Controlled			
			Pneumatic	Pressure Controlled			
	Mounting	Type	Inline				
Orientation		Any, preferably vertical					
Connection		Threaded Port			NPT		
					G		
Manual Override (Solenoid Controlled valves)		Non-locking button					
OPERATING CONDITIONS	Temperature	Solenoid Pilot Controlled	Standard	Ambient	0° to 122°F (-17° to 50°C)		
				Media			
			High	Ambient	0° to 180°F (-17° to 82°C)		
				Media	0° to 300°F (-17° to 150°C)		
			Low	Ambient	-40° to 122°F (-40° to 50°C)		
				Media	-40° to 175°F (-40° to 80°C)		
		Pressure Controlled	High	Ambient	0° to 300°F (-17° to 150°C)		
				Media			
			Low	Ambient	-40° to 175°F (-40° to 80°C)		
							Media
	For temperatures below 40°F (4°C) air must be free of water vapor to prevent formation of ice.						
	Buna-N	Flow Media		Filtered air			
		Operating Pressure		30 to 150 psig (2 to 10 bar)			
		Pilot Supply Pressure		Internal	Must meet minimum operating pressure		
				External	Must be equal to or greater than inlet pressure, and meet minimum operating pressure		
ELECTRICAL DATA FOR SOLENOID PILOT VALVES	Solenoids		Current Flow	Power Consumption		Operating Voltage (each solenoid)	
			DC	12 volts	4.5 watts		
				24 volts			
				24 volts (M12)	4.8 watts		
			AC	120 volts, 60 Hz	6.5 VA		
				240 volts, 60 Hz	6.8 VA		
			Rated for continuous duty				
	Enclosure Rating		IP 65				
	Electrical Connection		DIN EN 175301-803		Form A		
			Form B				
M12							
		1/2" Conduit coil with 30" leads					
CONSTRUCTION MATERIAL	Valve Body		Cast Aluminum				
	Poppet		Aluminum and Stainless Steel				
	Seals	Fluorocarbon	Viton				
		Nitrile Rubber	Buna-N				
SAFETY DATA	Safety Integrity Level (SIL)		Certified by TÜV Rheinland in accordance to IEC 61508 and IEC 61511 safety integrity level 2 (SIL 2) and EN ISO 13849-1, PL c (with application specific diagnosis) in singular application with HFT = 0 and SIL 3 and PL d in redundant application with HFT≥1, for details see certificate.				
			IMPORTANT NOTE: Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.				



Ordering Information

2/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR2-Way 2-Position Valves

Port Thread

NPT

Leave Blank

G

D

Actuation

Solenoid Controlled

Valve Function

2/2 Normally Closed

1

2/2 Normally Open

2

Series

21

7

1

B

200

1

W

-

1

Revision Level

Body Size	Port Size	Internal Pilot Supply	External Pilot Supply
	In-Out		
3/8	1/4	200	205
	3/8	300	305
	1/2	401	406
3/4	1/2	400	405
	3/4	500	505
	1	601	606
1-1/4	1	600	605
	1-1/4	700	705
	1-1/2	801	806

Temperature	Coil Type		
Standard	DINEN 175301-803	Form A	1
		Form B	2
	M12		3
	1/2" Conduit		4
Low	DINEN 175301-803	Form B	5*
3/8 & 3/4 Body Size only			
High	1/2" Conduit		6**

* Buna-N valve seals option required (2)

** Fluorocarbon valve seals option required (1)

Current	Voltage*		
DC	12 V		H
	24 V		W
AC	120 V, 60 Hz		Z
	240 V, 60 Hz		Y

* For other voltages consult ROSS.

Valve Seals		
Fluorocarbon		1
Buna-N		2

Model Number examples: 2171B3001W-1, 2171B2001Z-3.

Size		Flow C _v (NI/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.7 (1700)	1.6 (1600)	10	0.96	0.96	1.9 (0.9)
	3/8	2.2 (2200)	2.5 (2500)	10	0.90	0.93	
	1/2	2.6 (2600)	2.8 (2800)	10	0.82	0.88	
3/4	1/2	6.6 (6500)	6.3 (6200)	14	0.39	0.50	4.3 (2.0)
	3/4	7.7 (7600)	7.4 (7300)	14	0.32	0.37	
	1	8.3 (8200)	7.6 (7500)	14	0.31	0.36	
1-1/4	1	20 (20000)	19 (19000)	26	0.19	0.20	11.1 (5.0)
	1-1/4	29 (29000)	23 (23000)	26	0.14	0.18	
	1-1/2	31 (31000)	23 (23000)	26	0.13	0.17	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed

Normally Open

Solenoid Pilot

1/8" External Pilot Supply

Manual Override

Port 2 (Outlet)

Port 1 (Inlet)

4

© 2026, ROSS®. All Rights Reserved.


2/2 Solenoid Pilot Controlled Valves

DIMENSIONS


Inches (mm)

with DIN EN 175301-803 Coil


Body Size 3/8

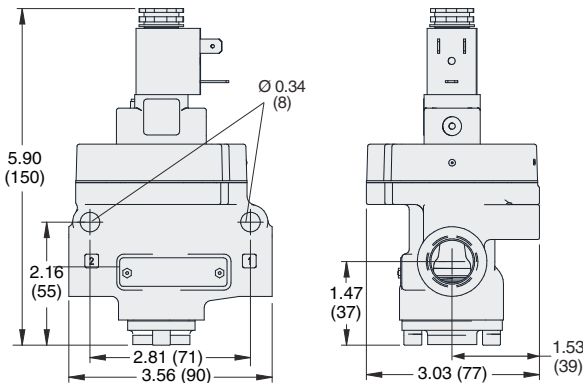

Body Size 3/4

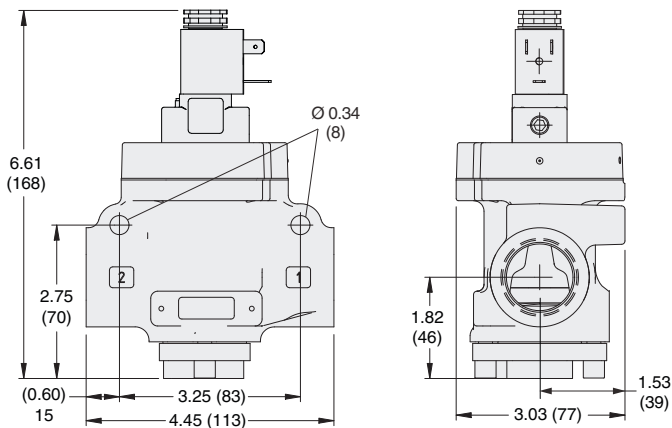

Body Size 1-1/4

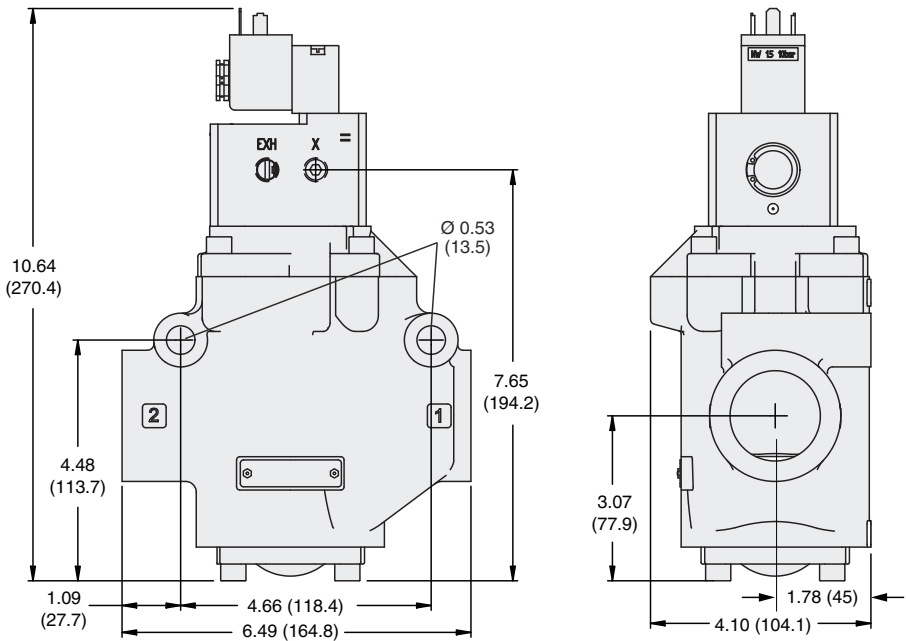

Downloadable CAD models available.

Ordering Information

3/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR

3-Way 2-Position Valves

Port Thread

NPT

Leave Blank

G

D

Actuation

Solenoid Controlled

Valve Function

3/2 Normally Closed

3

3/2 Normally Open

4

Series

21

7

3

B

200

1

W

-

1

Revision Level

Body Size	Port Size		Internal Pilot Supply	External Pilot Supply
	In-Out	Exhaust		
3/8	1/4	1/2	200	205
	3/8	1/2	300	305
	1/2	1/2	401	406
3/4	1/2	1	400	405
	3/4	1	500	505
	1	1	601	606
1-1/4	1	1-1/2	600	605
	1-1/4	1-1/2	700	705
	1-1/2	1-1/2	801	806

Temperature	Coil Type		
Standard	DINEN 175301-803	Form A	1
		Form B	2
	M12		3
		1/2" Conduit	
Low	DINEN 175301-803	Form B	5*
3/8 & 3/4 Body Size only			
High	1/2" Conduit		6**

* Buna-N valve seals option required (2)

** Fluorocarbon valve seals option required (1)

Current	Voltage*		
DC	12 V		H
	24 V		W
AC	120 V, 60 Hz		Z
	240 V, 60 Hz		Y

* For other voltages consult ROSS.

Valve Seals

Fluorocarbon

1

Buna-N

2

Model Number examples: 2173B3001W-1, 2173B2001Z-3.

Size			Flow C _v (NI/min)				Average Response Constants*				≈ Weight lb (kg)	
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2		2-3
3/8	1/4	1/2	1.7 (1700)	3.2 (3100)	1.7 (1700)	2.4 (2400)	10	1.76	2.08	1.60	2.30	1.9 (0.9)
	3/8	1/2	2.5 (2500)	4.4 (4300)	2.7 (2700)	2.6 (2600)	10	0.95	1.07	1.03	1.60	
	1/2	1/2	2.6 (2600)	4.6 (4600)	3.0 (3000)	2.8 (2800)	10	0.94	0.98	11.00	2.00	
3/4	1/2	1	6.0 (5900)	8.8 (8700)	5.9 (5800)	7.6 (7500)	11	0.58	0.64	0.50	0.70	4.3 (2.0)
	3/4	1	7.5 (7400)	11 (11000)	7.5 (7400)	8.0 (7900)	11	0.38	0.41	0.43	0.67	
	1	1	7.9 (7800)	12 (12000)	8.3 (8200)	8.4 (8300)	11	0.24	0.36	0.42	0.60	
1-1/4	1	1-1/2	20 (20000)	27 (27000)	19 (19000)	23 (23000)	28	0.16	0.18	0.17	0.20	11.1 (5.0)
	1-1/4	1-1/2	28 (28000)	33 (32000)	22 (22000)	25 (25000)	28	0.12	0.17	0.15	0.19	
	1-1/2	1-1/2	29 (29000)	33 (32000)	22 (22000)	26 (26000)	28	0.12	0.16	0.13	0.18	

* Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed

Normally Open

Solenoid Pilot

Port 3 (Exhaust)

Port 2 (Outlet)

Port 1 (Inlet)

X-1

1/8" External Pilot Supply


3/2 Solenoid Pilot Controlled Valves

DIMENSIONS


Inches (mm)

with DIN EN 175301-803 Coil


Body Size 3/8

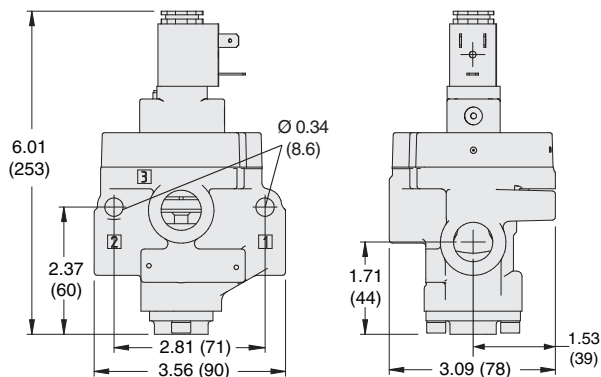

Body Size 3/4

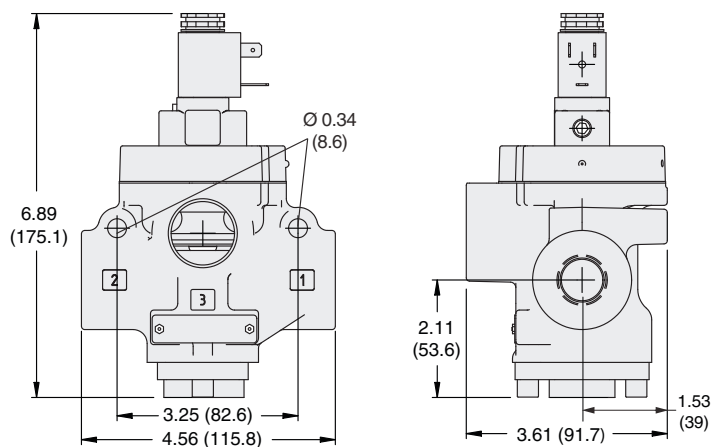

Body Size 1-1/4

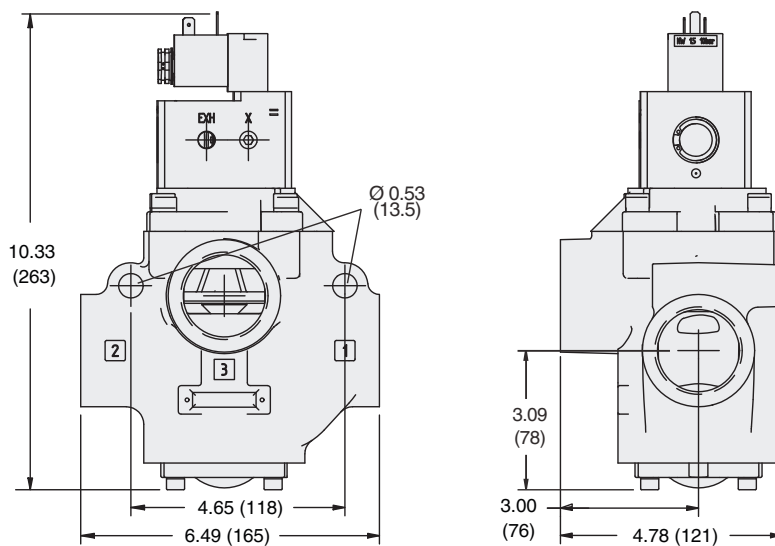

Downloadable CAD models available.

Ordering Information

4/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR

4-Way 2-Position Valves

Port Thread

NPT
Leave Blank

G

D

Actuation

Solenoid Controlled

Valve Function

4/2

Series

21

7

6

B

200

1

W

-

1

Coil Type

DIN EN 175301-803 Form A

Current

Voltage*

DC

12 V

H

24 V

W

AC

120 V, 60 Hz

Z

240 V, 60 Hz

Y

* For other voltages consult ROSS.

Revision Level

21

7

6

B

200

1

W

-

1

Body Size	Port Size		Internal Pilot Supply	External Pilot Supply
	In-Out	Exhaust		
3/8	1/4	1/2	200	205
	3/8	1/2	300	305
	1/2	1/2	401	406
3/4	1/2	1	400	405
	3/4	1	500	505
	1	1	601	606
1-1/4	1	1-1/2	600	605
	1-1/4	1-1/2	700	705
	1-1/2	1-1/2	801	806

Valve Seals

Fluorocarbon

1

Buna-N


2

Model Number examples: 2176B3001W-1, 2176B2001Z-1.

Size			Flow C _v (NI/min)				Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3	1-2	2-3	1-4	4-3	M	F		
								1-2, 1-4	2-3, 4-3	
3/8	1/4	1/2	1.6 (1600)	2.3 (2300)	1.7 (1700)	2.7 (2700)	30	1.70	2.28	3.1 (1.4)
	3/8	1/2	2.6 (2600)	3.1 (3100)	2.8 (2800)	3.6 (3500)	30	1.13	1.33	
	1/2	1/2	3.1 (3100)	3.8 (3700)	2.9 (2900)	4.6 (4500)	30	1.00	1.22	
3/4	1/2	1	5.3 (5200)	6.4 (6300)	4.5 (4400)	6.9 (6800)	46	0.50	0.76	5.9 (2.7)
	3/4	1	7.0 (6900)	7.7 (7600)	6.3 (6200)	10 (9800)	46	0.36	0.55	
	1	1	7.6 (7500)	7.7 (7600)	6.4 (6300)	11 (11000)	46	0.36	0.50	
1-1/4	1	1-1/2	14 (14000)	22 (22000)	18 (18000)	24 (24000)	99	0.19	0.22	12.1 (5.5)
	1-1/4	1-1/2	17 (17000)	24 (24000)	25 (25000)	28 (28000)	99	0.19	0.22	
	1-1/2	1-1/2	19 (19000)	24 (24000)	26 (26000)	28 (28000)	99	0.16	0.22	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



Solenoid Pilot

Port 3 (Exhaust)

1/8" External Pilot Supply

X-1

Port 4 (Outlet)

Port 2 (Outlet)

Port 1 (Inlet)


4/2 Solenoid Pilot Controlled Valves

DIMENSIONS


Inches (mm)

with DIN EN 175301-803 Coil


Body Size 3/8

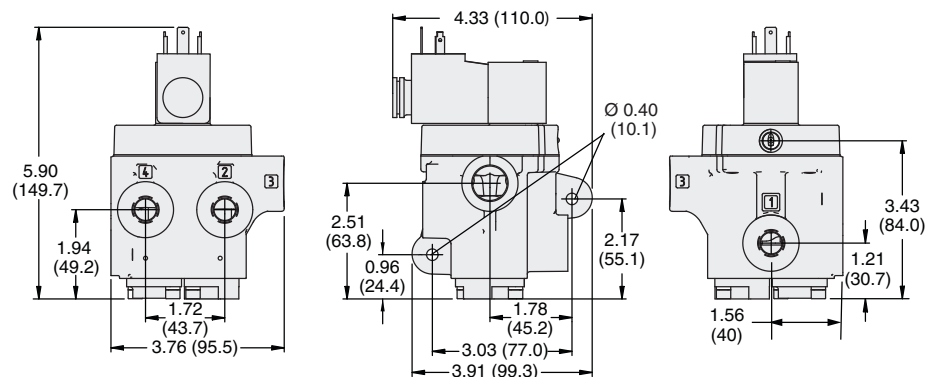

Body Size 3/4

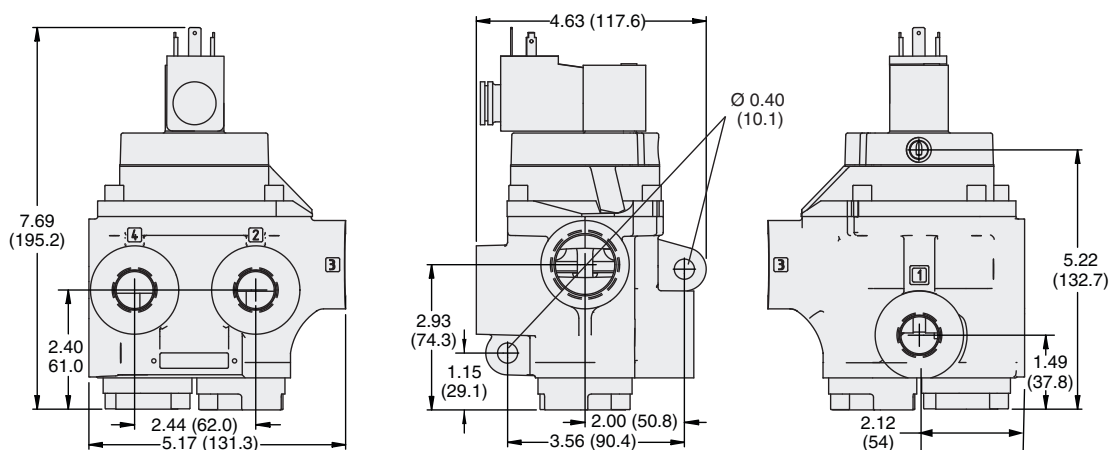

Body Size 1-1/4

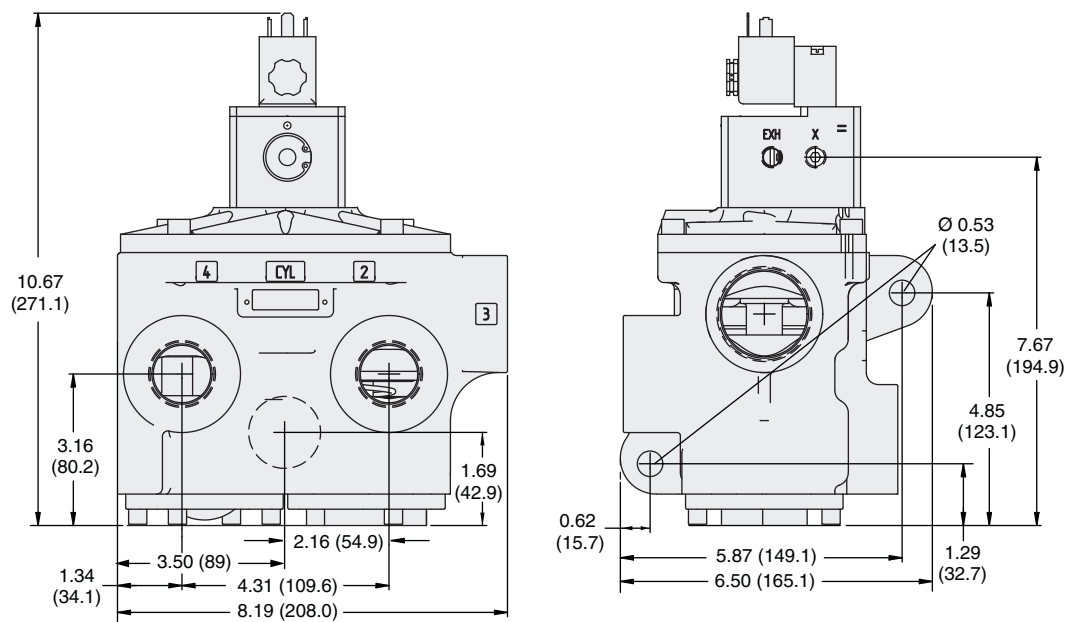

Downloadable CAD models available.

Ordering Information

2/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR2-Way 2-Position Valves

Port Thread

NPT

Leave Blank

G

D

Series

21

5

1

B

200

1

Actuation

Pressure Controlled

Valve Function

2/2 Normally Closed

1

2/2 Normally Open

2

Revision Level

Temperature

High

Low

Valve Seals

Fluorocarbon

Buna-N

1

2

Body Size

3/8

3/4

1-1/4

Port Size

In-Out

1/4

3/8

1/2

1/2

3/4

1

1-1/4

1-1/2

200

300

401

400

500

601

600

700

801

Model Number examples: 2151B3001, 2151B2001.

Size		Flow C _v (NI/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.7 (1700)	1.6 (1600)	10	0.91	0.91	1.2 (0.6)
	3/8	2.2 (2200)	2.5 (2500)	10	0.70	0.76	
	1/2	2.6 (2600)	2.8 (2800)	10	0.64	0.72	
3/4	1/2	6.6 (6500)	6.3 (6200)	16	0.37	0.43	1.9 (0.9)
	3/4	7.7 (7600)	7.4 (7300)	16	0.34	0.39	
	1	8.3 (8200)	7.6 (7500)	16	0.34	0.37	
1-1/4	1	20 (20000)	19 (19000)	27	0.17	0.17	6.3 (2.9)
	1-1/4	29 (29000)	23 (23000)	27	0.19	0.19	
	1-1/2	31 (31000)	23 (23000)	27	0.18	0.18	

* Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed

Normally Open

1/4" Signal Port


Port 2 (Outlet)Port 1 (Inlet)

2/2 Pressure Controlled Valves


DIMENSIONS

Inches (mm)


Body Size 3/8

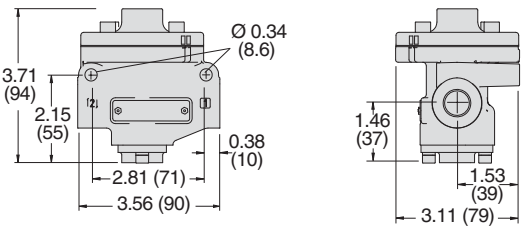

Body Size 3/4

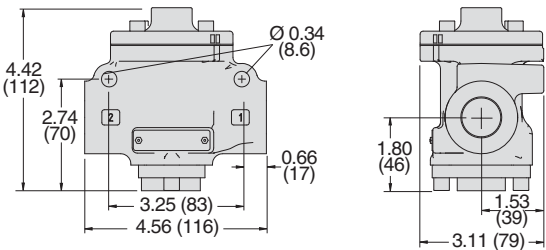

Body Size 1-1/4

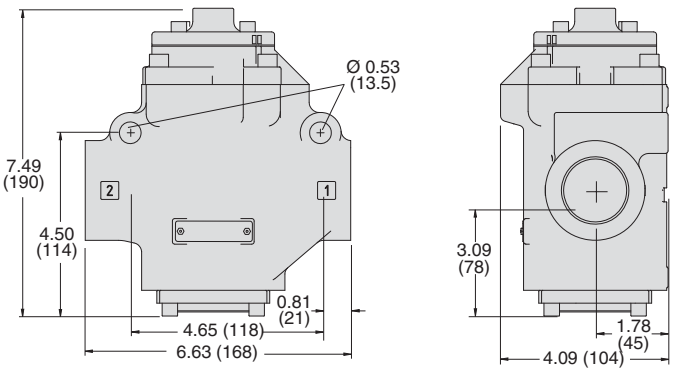

Downloadable CAD models available.



Ordering Information

3/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR

3-Way 2-Position Valves

Port Thread

NPT

Leave Blank

G

D

Series

Actuation

Pressure Controlled

Valve Function

3/2 Normally Closed

3

3/2 Normally Open

4

Revision Level

21

5

3

B

200

1

Temperature

Valve Seals

High

Fluorocarbon

1

Low

Buna-N

2

Body Size

Port Size

In-Out

Exhaust

3/8

1/4

1/2

200

3/8

1/2

300

1/2

1/2

401

3/4

1/2

1

400

3/4

1

500

1

1

601

1-1/4

1

1-1/2

600

1-1/4

1-1/2

700

1-1/2

1-1/2

801

Model Number examples: 2153B3001, 2153B2001.

Size			Flow C _v (NI/min)				Average Response Constants*				≈ Weight lb (kg)	
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2		2-3
3/8	1/4	1/2	1.7 (1700)	3.2 (3100)	1.7 (1700)	2.4 (2400)	10	1.76	2.08	1.60	2.30	1.3 (0.6)
	3/8	1/2	2.5 (2500)	4.4 (4300)	2.7 (2700)	2.6 (2600)	10	0.95	1.07	1.03	1.60	
	1/2	1/2	2.6 (2600)	4.6 (4600)	3.0 (3000)	2.8 (2800)	10	0.94	0.98	11.00	2.00	
3/4	1/2	1	6.0 (5900)	8.8 (8700)	5.9 (5800)	7.6 (7500)	11	0.58	0.64	0.50	0.70	2.0 (0.9)
	3/4	1	7.5 (7400)	11 (11000)	7.5 (7400)	8.0 (7900)	11	0.38	0.41	0.43	0.67	
	1	1	7.9 (7800)	12 (12000)	8.3 (8200)	8.4 (8300)	11	0.24	0.36	0.42	0.60	
1-1/4	1	1-1/2	20 (20000)	27 (27000)	19 (19000)	23 (23000)	28	0.16	0.18	0.17	0.20	6.1 (2.8)
	1-1/4	1-1/2	28 (28000)	33 (32000)	22 (22000)	25 (25000)	28	0.12	0.17	0.15	0.19	
	1-1/2	1-1/2	29 (29000)	33 (32000)	22 (22000)	26 (26000)	28	0.12	0.16	0.13	0.18	

* Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed

Normally Open

12

2

3

1

10

2

3

1

1/4" Signal Port

Port 3 (Exhaust)

Port 2 (Outlet)


Port 1 (Inlet)

3/2 Pressure Controlled Valves


DIMENSIONS

Inches (mm)


Body Size 3/8

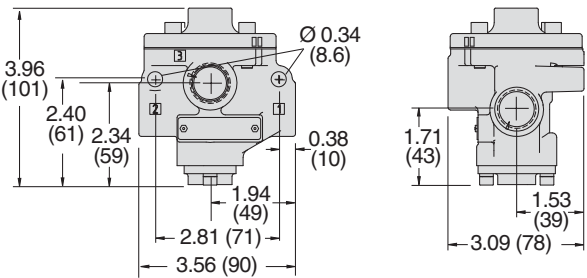

Body Size 3/4

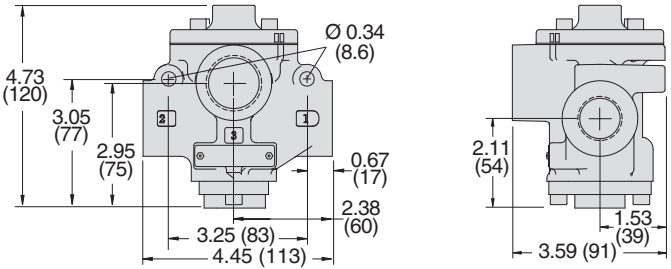

Body Size 1-1/4

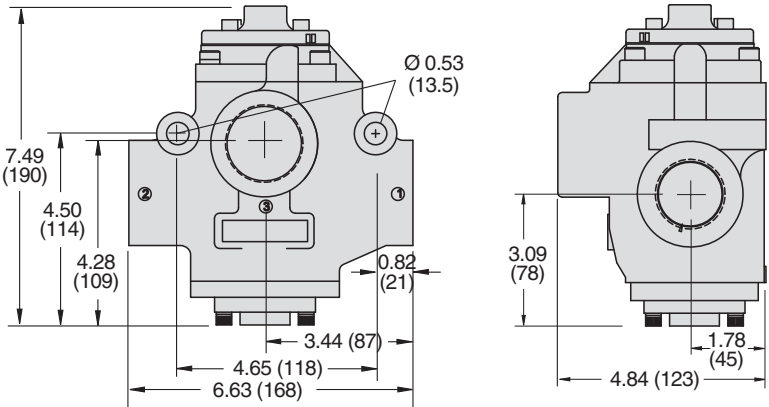

Downloadable CAD models available.



Ordering Information

4/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR4-Way 2-Position Valves

Port Thread

NPT

Leave Blank

G

D

Series

21

Actuation

Pressure Controlled

Valve Function

4/2

Revision Level

6

Temperature

Valve Seals

High

Fluorocarbon

1

Low

Buna-N

2

Body Size

Port Size

In-Out

Exhaust

3/8

1/4

1/2

200

3/8

3/8

1/2

300

3/8

1/2

1/2

401

3/4

1/2

1

400

3/4

3/4

1

500

3/4

1

1

601

1-1/4

1

1-1/2

600

1-1/4

1-1/4

1-1/2

700

1-1/4

1-1/2


1-1/2

801

Model Number examples: 2156B3001, 2156B2001.

Size				Flow C _v (NI/min)				Average Response Constants*			≈ Weight lb (kg)
Body	Port 1	Port 2, 4	Port 3	1-2	2-3	1-4	4-3	M	F		
									1-2, 1-4	2-3, 4-3	
3/8	1/4	1/4	1/2	1.6 (1600)	2.3 (2300)	1.7 (1700)	2.7 (2700)	30	1.70	2.28	1.7 (0.8)
	3/8	3/8	1/2	2.6 (2600)	3.1 (3100)	2.8 (2800)	3.6 (3500)	30	1.13	1.33	
	1/2	1/2	1/2	3.1 (3100)	3.8 (3700)	2.9 (2900)	4.6 (4500)	30	1.00	1.22	
3/4	1/2	1/2	1	5.3 (5200)	6.4 (6300)	4.5 (4400)	6.9 (6800)	46	0.50	0.76	4.1 (1.9)
	3/4	3/4	1	7.0 (6900)	7.7 (7600)	6.3 (6200)	10 (9800)	46	0.36	0.55	
	1	1	1	7.6 (7500)	7.7 (7600)	6.4 (6300)	11 (11000)	46	0.36	0.50	
1-1/4	1	1	1-1/2	14 (14000)	22 (22000)	18 (18000)	24 (24000)	99	0.19	0.22	10.5 (4.8)
	1-1/4	1-1/4	1-1/2	17 (17000)	24 (24000)	25 (25000)	28 (28000)	99	0.19	0.18	
	1-1/2	1-1/2	1-1/2	19 (19000)	24 (24000)	26 (26000)	28 (28000)	99	0.16	0.15	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

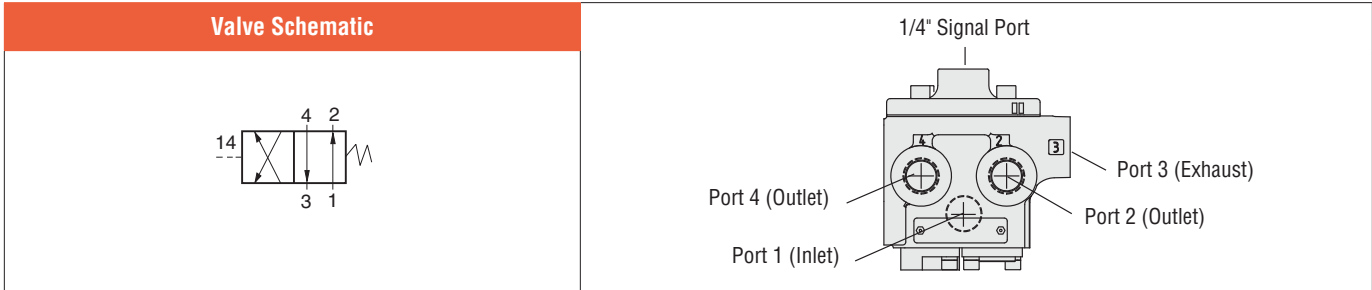


4/2 Pressure Controlled Valves


DIMENSIONS

Inches (mm)


Body Size 3/8

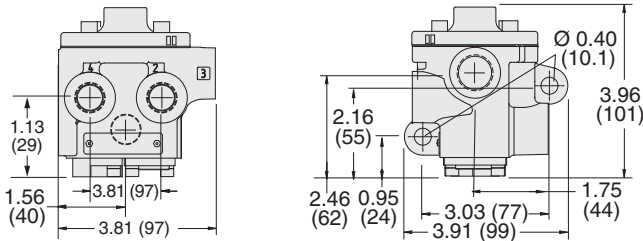

Body Size 3/4

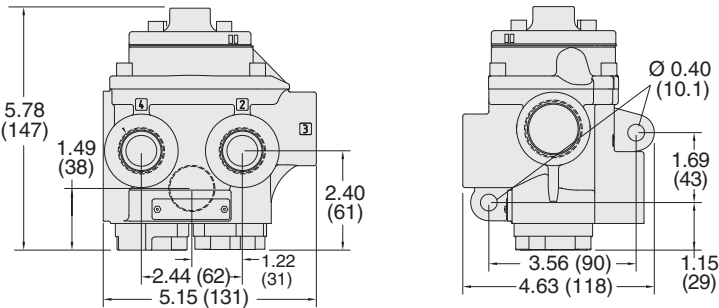




Body Size 1-1/4

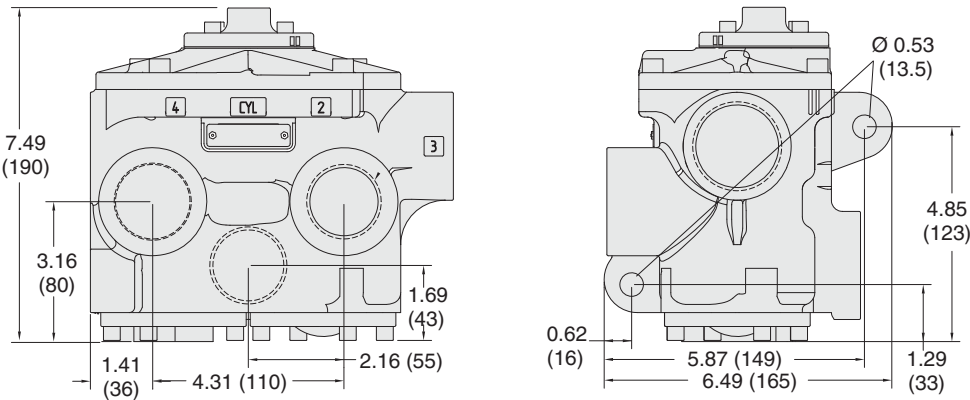

Downloadable CAD models available.



Solenoid Coils Data

Valve Solenoid Pinout			
DIN EN 175301-803			
Form A	Form B	M12	
		1 - Positive 2 - Negative 4 - Ground 	

ELECTRICAL CONNECTORS

with Cable Grip, without Light	with Cable Grip, with Light	1/2" NPT Conduit
		

Illustration examples.

Connectors	Connector					Model Number			
	Type	Connection	Fitting Connection	Quantity Included	Maximum Cord Diameter mm	Without Light	Lighted Connector *		
							24 V DC	120 V AC	230 V AC
	DIN EN 175301-803 Form A	Solenoid	Cable grip	1	8 to 10	937K87	936K87-W	936K87-Z	936K87-Y
			1/2" NPT conduit	1	—	723K77	724K77-W	724K77-Z	724K77-Y
	DIN EN 175301-803 Form B	Solenoid	Cable grip	1	9mm	266K77	267K77-W	267K77-Z	267K77-Y
			1/2" NPT conduit	1	—	2873K77	—	—	—


PREWIRED ELECTRICAL CONNECTORS

Prewired Electrical Connectors	
Cable with Connector without Light	Cable with Lighted Connector
	

Illustration examples.

Prewired Connectors	Cable						Model Number			
	End 1	End 2	Connection	Quantity Included	Length feet (meters)	Cord Diameter mm	Without Light	Lighted Connector *		
	Connector	Cord						24 V DC	120 V AC	230 V AC
	DIN EN 175301-803 Form A	Flying leads	Solenoid	1	6.5 (2)	6	721K77	720K77-W	720K77-Z	720K77-Y
				1	6.5 (2)	10	371K77	383K77-W	383K77-Z	383K77-Y
	DIN EN 175301-803 Form B	Flying leads	Solenoid	1	6.5 (2)	10	372K77	382K77-W	382K77-Z	382K77-Y
	Molded DIN EN 175301-803 Form B	Flying leads	Solenoid	1	6 (1.8)	—	2872K77	—	—	—

Solenoid Connector Pinouts

DIN EN 175301-803		
Form A	Form B	
		1 - Black 2 - Black 4 - Green/Yellow (Ground)

* Lights in connectors with a translucent housing can be used as indicator lights to show when solenoids are energized.

EXHAUST SILENCERS

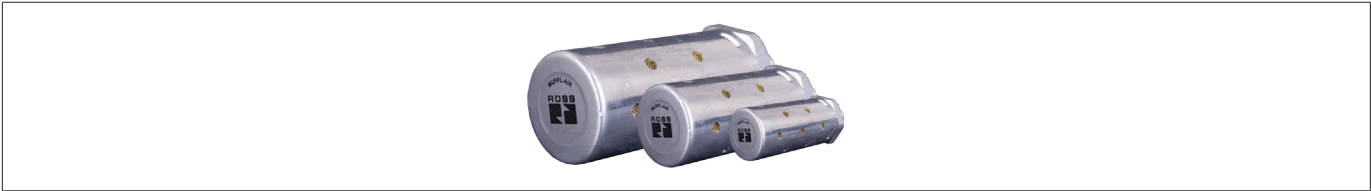


Illustration example.

Silencers	SPECIFICATIONS		Silencer Material		Pressure Range psig (bar)		Schematic	
			Aluminum		0-290 (0-20) maximum			
	Port Size	Thread Type	Flow C _v (NI/min)	Model Number		Dimensions inches (mm)		Weight lb (kg)
				NPT Thread	R/Rp Thread	Length	Hex Size (D)	
	1/2	Male	6.8 (6700)	5500A4003	D5500A4003	3.6 (9)	1.25 (32)	0.2 (0.1)
	1	Male	18 (18000)	5500A6003	D5500A6003	5.4 (14)	2.0 (51)	0.9 (0.4)
	1-1/2	Female	39 (38000)	5500A8001	D5500A8001	5.7 (14)	2.5 (64)	1.3 (0.6)

ROSS OPERATING VALVE, ROSS CONTROLS®, ROSS DECCO®, AUTOMATIC VALVE INDUSTRIAL, and MASTER PNEUMATIC, collectively the “ROSS Global Family”.

PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure all sources of energy are turned off, the entire pneumatic system is shut down and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).
2. All ROSS Global Family Products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any product can be tampered with and/or need servicing after installation, persons responsible for the safety of others or the care of equipment must check ROSS Global Family Products on a regular basis and perform all necessary maintenance to ensure safe operating conditions.
3. All applicable instructions should be read and complied with before using any fluid power system to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS Global Family location.
4. Each ROSS Global Family Product should be used within its specification limits. In addition, use only ROSS ROSS Global Family components to repair ROSS Global Family Products.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

FILTRATION and LUBRICATION

1. Dirt, scale, moisture, etc., are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. The ROSS Global Family recommends a filter with a 5-micron rating for normal applications.
2. All standard ROSS Global Family filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition and hazardous leakage. Immediately replace crazed, cracked, or deteriorated bowls.
3. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum base oils with oxidation inhibitors, an aniline point between 180°F (82°C) and

220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks personal injury, and/or damage to property.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

AVOID INTAKE/EXHAUST RESTRICTION

1. Do not restrict air flow in the supply line. To do so could reduce the pressure of the supply air below minimum requirements for the valve and thereby causing erratic action.
2. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

SAFETY APPLICATIONS

1. Mechanical Power Presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
2. Safe Exhaust (dump) valves without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All Safe Exhaust valve installations should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
3. Per specifications and regulations, the ROSS L-O-X® and L-O-X® with EEZ-ON®, N06 and N16 Series operation products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

WARNINGS: Failure to follow these instructions can result in personal injury and/or property damage.

STANDARD WARRANTY

All products sold by the ROSS Global Family are warranted for a one-year period [with the exception of Air Preparation products which are warranted for a period of seven (7) years] from the date of purchase. All products are, during their respective warranty periods, warranted to be free of defects in material and workmanship. The ROSS Global Family's obligation under this warranty is limited to repair, replacement or refund of the purchase price paid for products which the ROSS Global Family has determined, in its sole discretion, are defective. All warranties become void if a product has been subject to misuse, misapplication, improper maintenance, modification or tampering. Products for which warranty protection is sought must be returned to the ROSS Global Family freight prepaid.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND THE ROSS GLOBAL FAMILY EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE ROSS GLOBAL FAMILY MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS THE ROSS GLOBAL FAMILY LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF THE ROSS GLOBAL FAMILY MAY EXTEND THE LIABILITY OF THE ROSS GLOBAL FAMILY AS SET FORTH HEREIN.



GLOBAL LOCATIONS

ROSS [®]	AMERICAS	USA	ROSS CONTROLS	Tel: +1-248-764-1800	www.rosscontrols.com
		Canada	ROSS CANADA	Tel: +1-416-251-7677	www.rosscanada.com
		Brazil	ROSS BRASIL	Tel: +55-11-4335-2200	www.rosscontrols.com.br
	EUROPE	Germany	ROSS EUROPA	Tel: +49 (0)6103-7597-100	www.rosseuropa.com
		France	ROSS FRANCE	Tel: +33 (0)1-49-45-65-65	www.rossfrance.com
		United Kingdom	ROSS UK	Tel: +44 (0)1254 872277	www.rossuk.co.uk
	ASIA & PACIFIC	India	ROSS CONTROLS INDIA	Tel: +91-44-2624-9040	www.rosscontrolsindia.com
		China	ROSS CONTROLS CHINA	Tel: +86-21-6915-7961	www.rosscontrolschina.com
		Japan	ROSS ASIA	Tel: +81-42-778-7251	www.rossasia.co.jp



www.automaticvalve.com



www.rossdecco.com



www.manufactis.net



www.masterpneumatic.com



www.pneumatrol.com



www.ubsafe.com