



ISO 5599-2 VALVES



PRODUCT CATALOG

ISO 5599-2 Valves W65 Series

Product Overview

The ROSS® ISO 5599-2 valves W65 Series are base mounted spool and sleeve valves that conform to the ISO standards 5599-2 mounting interface. The W65 series has a base electrical connector which eliminates the need to disconnect wires to remove the valve. Manifold bases feature the option for modular plug-together electrical connections terminating at end plates, offering a 25-pin D-sub or 19-pin round interface. Automotive connector option mounted to individual conduit cover. The ISO Valves W65 Series are adaptable to Serial Bus System.

These ISO Size 1, 2, and 3 valves are available as, 2- and 3-position, 5-ported 4-way solenoid pilot or pressure controlled valves with either internal or external pilot supply.

Solenoid Pilot Controlled		Pressure Controlled
Single Solenoid	Double Solenoid	
		

Illustration examples.

VALVE FEATURES

Spool and Sleeve Design	Spool and Sleeve construction for high dirt tolerance; there are no seals to wear out
Mounting Options	Individual sub-base or manifold base mounting
Pilot Supply	Solenoid pilot controlled valves – Internal or external, selected automatically Pressure controlled valves – External
Pilot Operation	Provides high shifting force with low power consumption

Actuation	ISO Size	Available Inlet Port Sizes					Functions					Flow C _v (NI/min)	Page
		1/8	1/4	3/8	1/2	3/4	5/2		5/3				
							Single	Double	Power Center	Closed Center	Open Center		
Solenoid Control	1	●	●	●			●	●	●	●	●	1.0 (980)	2 – 3 4 – 9
	2			●	●		●	●	●	●	●	2.3 (2300)	
	3				●	●	●	●	●	●	●	3.4 (3300)	
Pressure Control	1	●	●	●			●	●	●	●	●	1.0 (980)	2 – 3 10 – 15
	2			●	●		●	●	●	●	●	2.3 (2300)	
	3				●	●	●	●	●	●	●	3.4 (3300)	
Sub-Bases													16
Manifold Stations, End Stations													17
Manifold Accessories													18 – 24

STANDARD SPECIFICATIONS

GENERAL	Function	5/2 Valve	
		5/3 Valve	Power Center
			Closed Center
			Open Center
	Construction Design	Spool and Sleeve	
	Actuation	Electrical	Solenoid Pilot Controlled
		Pneumatic	Pressure Controlled
	Mounting	Base Mounted	
	Connection	Threaded Port	NPT
			G
	Manual Override (Solenoid Controlled valves)	Flush; metal, non-locking	

OPERATING CONDITIONS	Temperature	Solenoid Pilot Controlled	Ambient	40° to 120°F (4° to 50°C)
			Media	40° to 175°F (4° to 80°C)
		Pressure Controlled	Ambient	40° to 175°F (4° to 80°C)
			Media	
	Flow Media		Filtered air	
	Operating Pressure	ISO Size 1		30 to 150 psig (2 to 10 bar)
		ISO Size 2 & 3		15 to 150 psig (1 to 10 bar)
		All sizes also available up to 232 psig (16 bar)		
	Pilot Supply Pressure	Internal		Minimum 30 psig (2 bar)
		External		Must be equal to or greater than inlet pressure

ELECTRICAL DATA FOR SOLENOID PILOT VALVES	Solenoids	Current Flow	Power Consumption	Operating Voltage (each solenoid)
		DC	24 volts	3.5 watts on DC (at 10 bar)
		AC	110-120 volts	6.5 VA holding
			230-240 volts	
		Rated for continuous duty		
	Enclosure Rating	IP65, IEC 60529		
	Electrical Connection	DIN EN 175301-803	Form A	

CONSTRUCTION MATERIAL	Valve Body	Cast Aluminum		
	Spool	Stainless Steel		
	Seals	Buna-N		

IMPORTANT NOTE: Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.

PRODUCT CREDENTIALS

Certificate of Compliance		Declaration of Conformity	
			

Ordering Information

5/2 Single Solenoid Pilot Controlled Valves

SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

ISO Size	Base Port Size *	Valve Model Number		
		24 V DC	110-120 V AC	230 V AC
1	1/8 - 3/8	W6576A2401W	W6576A2401Z	W6576A2401Y
2	3/8 - 1/2	W6576A3401W	W6576A3401Z	W6576A3401Y
3	1/2 - 3/4	W6576A4401W	W6576A4401Z	W6576A4401Y

For other voltages, consult ROSS.


* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds pages, for use with or without serial bus system.

The W65 Series has a base electrical connector which eliminates the need to disconnect wires to remove the valve.
This eliminates drop cords, simplifies maintenance and connection to Serial Data Communication systems.




ISO Size	Base Port Size	Flow C _v (NI/min)	Average Response Constants *			Weight ≈ lb (kg)
			M	F		
		1-2		1-2	2-3	
1	1/8 - 3/8	1.0 (980)	29	3.5	4.9	1.5 (0.7)
2	3/8 - 1/2	2.3 (2300)	41	1.5	2.4	2.0 (1.0)
3	1/2 - 3/4	3.4 (3300)	51	0.8	1.1	3.5 (1.6)

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

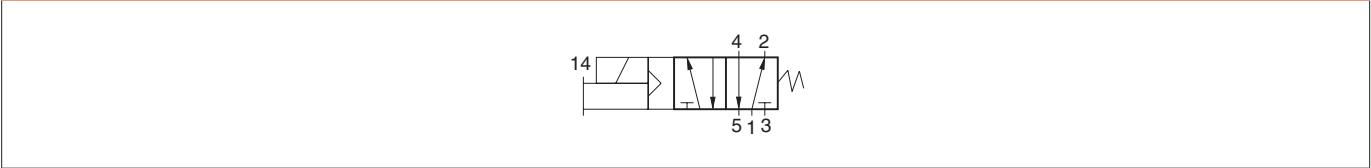

5/2 Single Solenoid Pilot Controlled Valves

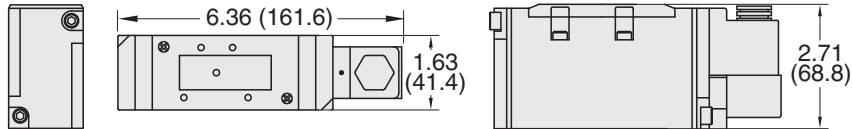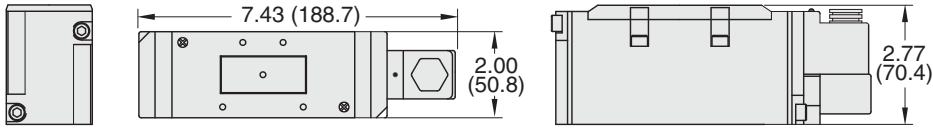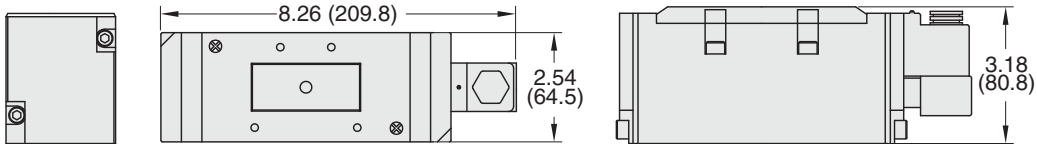DIMENSIONS	Inches (mm)
ISO Size 1	
ISO Size 2	
ISO Size 3	
Downloadable CAD models available.	

Ordering Information

5/2 Double Solenoid Pilot Controlled Valves

SOLENOID PILOT CONTROLLED VALVES

5-Way 2-Position Valves

ISO Size	Base Port Size *	Valve Model Number		
		24 V DC	110-120 V AC	230 V AC
1	1/8 - 3/8	W6576A2407W	W6576A2407Z	W6576A2407Y
2	3/8 - 1/2	W6576A3407W	W6576A3407Z	W6576A3407Y
3	1/2 - 3/4	W6576A4407W	W6576A4407Z	W6576A4407Y

For other voltages, consult ROSS.


* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds pages, for use with or without serial bus system.

The W65 Series has a base electrical connector which eliminates the need to disconnect wires to remove the valve.
This eliminates drop cords, simplifies maintenance and connection to Serial Data Communication systems.




ISO Size	Base Port Size	Flow C _v (NI/min)	Average Response Constants *			Weight ≈ lb (kg)
			M	F		
		1-2		1-2	2-3	
1	1/8 - 3/8	1.0 (980)	17	3.5	4.9	2.0 (1.0)
2	3/8 - 1/2	2.3 (2300)	20	1.5	2.5	2.5 (1.2)
3	1/2 - 3/4	3.4 (3300)	20	0.8	1.1	4.0 (1.9)

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

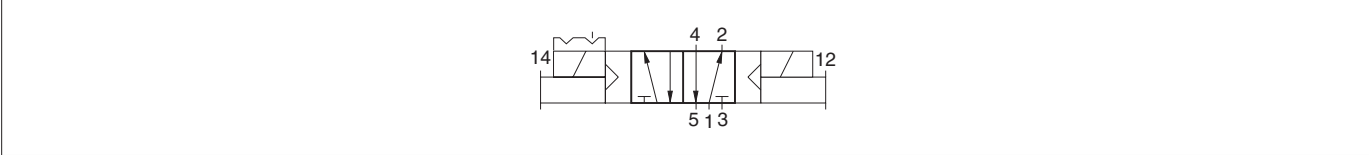

5/2 Double Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)
ISO Size 1	
ISO Size 2	
ISO Size 3	
Downloadable CAD models available.	

Ordering Information

5/3 Double Solenoid Pilot Controlled Valves

SOLENOID PILOT CONTROLLED VALVES

5-Way 3-Position Valves

Center Position	ISO Size	Base Port Size *	Valve Model Number		
			24 V DC	110-120 V AC	230 V AC
Power Center	1	1/4 – 3/8	W6577A2902W	W6577A2902Z	W6577A2902Y
	2	3/8 – 1/2	W6577A3901W	W6577A3901Z	W6577A3901Y
	3	3/8 – 3/4	W6577A4900W	W6577A4900Z	W6577A4900Y
Closed Center	1	1/4 – 3/8	W6577A2401W	W6577A2401Z	W6577A2401Y
	2	3/8 – 1/2	W6577A3401W	W6577A3401Z	W6577A3401Y
	3	3/8 – 3/4	W6577A4401W	W6577A4401Z	W6577A4401Y
Open Center	1	1/4 – 3/8	W6577A2407W	W6577A2407Z	W6577A2407Y
	2	3/8 – 1/2	W6577A3407W	W6577A3407Z	W6577A3407Y
	3	3/8 – 3/4	W6577A4407W	W6577A4407Z	W6577A4407Y

For other voltages, consult ROSS.

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds pages, for use with or without serial bus system.

The W65 Series has a base electrical connector which eliminates the need to disconnect wires to remove the valve. This eliminates drop cords, simplifies maintenance and connection to Serial Data Communication systems.

ISO Size	Base Port Size	Flow C _v (NI/min)	Average Response Constants *			Weight ≈ lb (kg)
			M	F		
		1-2		1-2	2-3	
1	1/8 - 3/8	1.0 (980)	30	3.5	5.0	2.0 (1.0)
2	3/8 - 1/2	2.3 (2300)	40	1.5	2.5	2.5 (1.2)
3	1/2 - 3/4	3.4 (3300)	50	0.8	1.1	4.0 (1.9)

* **Valve Response Time** – Response Time (msec) = $M + (F \cdot V)$. This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematics

Power Center	Closed Center	Open Center


Valve Technical Data

5/3 Double Solenoid Pilot Controlled Valves


DIMENSIONS

Inches (mm)


ISO Size 1

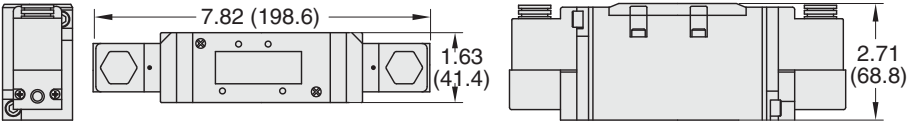

ISO Size 2

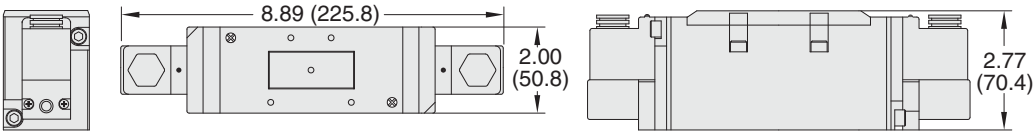

ISO Size 3

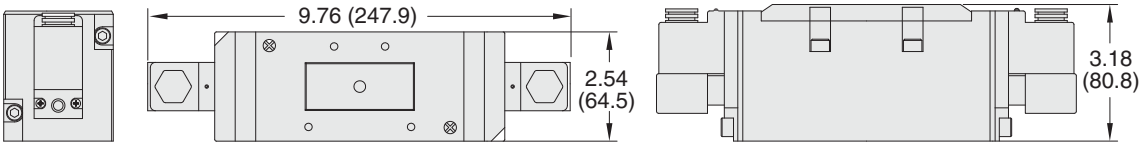

Downloadable CAD models available.



Ordering Information

5/2 Single Pressure Controlled Valves		
PRESSURE CONTROLLED VALVES		5-Way 2-Position Valves
ISO Size	Base Port Size *	Valve Model Number
1	1/8 - 3/8	W6556A2411
2	3/8 - 1/2	W6556A3411
3	1/2 - 3/4	W6556A4411
For other voltages, consult ROSS.		
* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds pages, for use with or without serial bus system.		

ISO Size	Base Port Size	Flow C _v (NI/min)	Average Response Constants *			Weight ≈ lb (kg)
			M	F		
		1-2		1-2	2-3	
1	1/8 - 3/8	1.0 (980)	29	3.5	4.9	0.8 (0.4)
2	3/8 - 1/2	2.3 (2300)	41	1.5	2.4	1.5 (0.7)
3	1/2 - 3/4	3.4 (3300)	51	0.8	1.1	3.0 (1.4)
* Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.						

Valve Schematic


The schematic diagram shows a 5/2-way valve. It has five ports: 1 (bottom center), 2 (top right), 3 (bottom right), 4 (top left), and 5 (bottom left). A solenoid, labeled 12, is connected to the top of the valve body. The internal flow paths are indicated by arrows: from port 4 to port 1, from port 2 to port 3, and from port 5 to port 1. The valve is shown in its default state with the solenoid energized.

5/2 Single Pressure Controlled Valves


DIMENSIONS

Inches (mm)


ISO Size 1

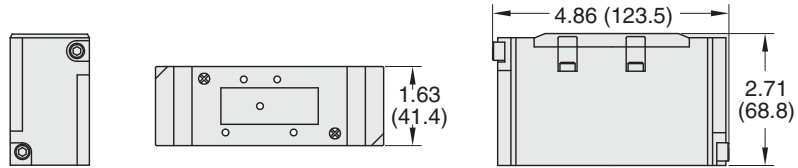

ISO Size 2

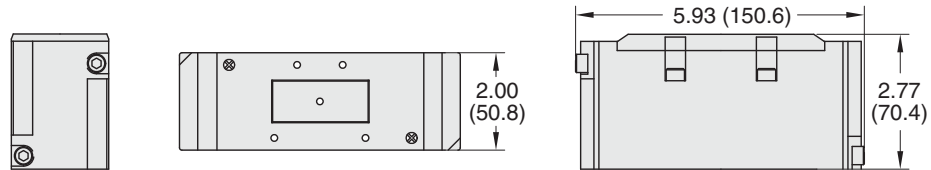

ISO Size 3

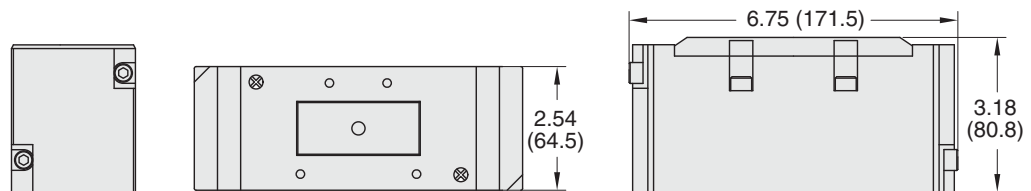

Downloadable CAD models available.

Ordering Information

5/2 Double Pressure Controlled Valves

PRESSURE CONTROLLED VALVES

5-Way 2-Position Valves


ISO Size	Base Port Size *	Valve Model Number
1	1/8 - 3/8	W6556A2417
2	3/8 - 1/2	W6556A3417
3	1/2 - 3/4	W6556A4417

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds pages, for use with or without serial bus system.

ISO Size	Base Port Size	Flow C _v (NI/min)	Average Response Constants *			Weight ≈ lb (kg)
			M	F		
		1-2		1-2	2-3	
1	1/8 - 3/8	1.0 (980)	17	3.5	5.0	0.8 (0.4)
2	3/8 - 1/2	2.3 (2300)	20	1.5	2.5	1.5 (0.7)
3	1/2 - 3/4	3.4 (3300)	20	0.8	1.1	3.0 (1.4)

* **Valve Response Time** – Response Time (msec) = $M + (F \cdot V)$. This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic




5/2 Double Pressure Controlled Valves


DIMENSIONS

Inches (mm)


ISO Size 1

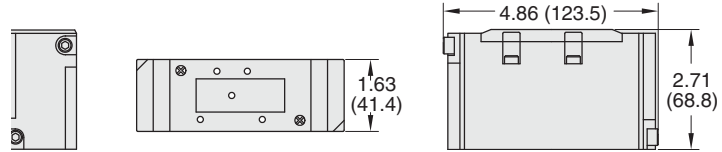

ISO Size 2

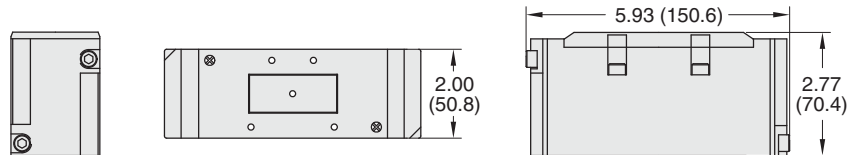

ISO Size 3

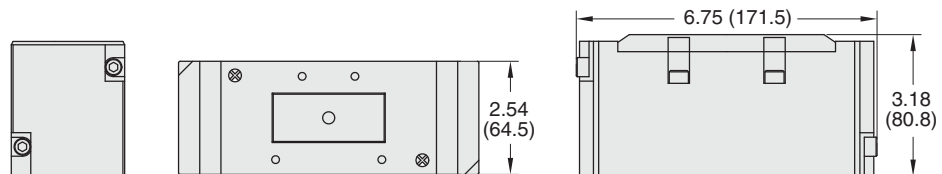

Downloadable CAD models available.

Ordering Information

5/3 Double Pressure Controlled Valves

PRESSURE CONTROLLED VALVES5-Way 3-Position Valves




Center Position	ISO Size	Base Port Size *	Valve Model Number
			24 V DC
Power Center	2	3/8 - 1/2	W6557A3901
	3	1/2 - 3/4	W6557A4900
Closed Center	1	1/8 - 3/8	W6557A2411
	2	3/8 - 1/2	W6557A3411
	3	1/2 - 3/4	W6557A4411
Open Center	1	1/8 - 3/8	W6557A2417
	2	3/8 - 1/2	W6557A3417
	3	1/2 - 3/4	W6557A4417

* Sub-bases and manifold bases ordered separately. Please see Sub-Bases and Manifolds pages, for use with or without serial bus system.

ISO Size	Base Port Size	Flow C _v (NI/min)	Average Response Constants *			Weight ≈ lb (kg)
			M	F		
		1-2		1-2	2-3	
1	1/8 - 3/8	1.0 (980)	30	3.5	5.0	0.8 (0.4)
2	3/8 - 1/2	2.3 (2300)	40	1.5	2.5	1.5 (0.7)
3	1/2 - 3/4	3.4 (3300)	50	0.8	1.1	3.0 (1.4)

* Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematics

Power Center	Closed Center	Open Center
		


Valve Technical Data

5/3 Double Pressure Controlled Valves


DIMENSIONS

Inches (mm)


ISO Size 1

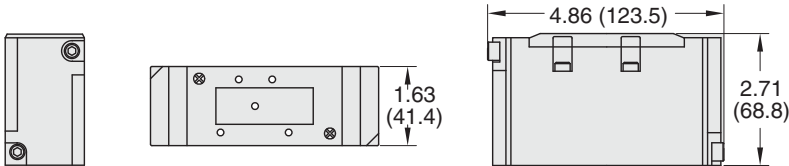

ISO Size 2

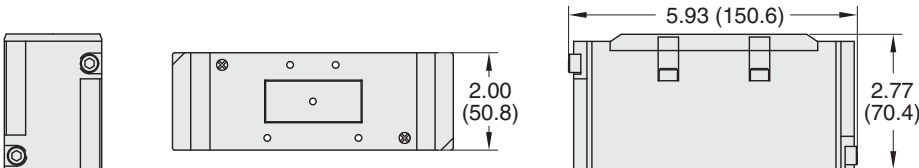

ISO Size 3

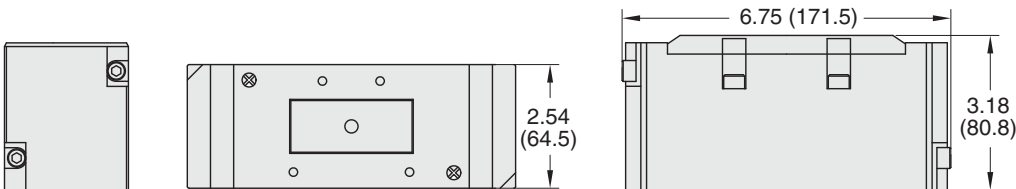

Downloadable CAD models available.



Sub-Bases – Side and Bottom-Ported

SIDE AND BOTTOM-PORTED SUB-BASES				
ISO Size	Port Size	Port Location	Model Number	
			NPT Thread	G Thread
1	3/8	Side/Bottom	972N91	D950N91
2	1/2	Side	953N91	D953N91
		Side/Bottom	954N91	—
3	3/4	Side/Bottom	—	D958N91



Illustration example.

DIMENSIONS

Inches (mm)

(2) Pilot ports: 1/8" NPTF (G 1/8);
Used for external pilot supply.

(2) Mounting holes:
ISO 1 - 0.21 (5.3) diameter.
ISO 2, 3 - 0.25 (6.4) diameter.

(1) Conduit port:
1/2" NPTF (G 1/2).

Wireway

12 End (Brown)

14 End (Orange)

Note: Port 1 is 0.117" (3 mm) off center line, ISO 2, 3 fall on center line.

	ISO Size		
	1	2	3
A	0.5 (13)	0.6 (16)	0.8 (21)
B	1.0 (26)	1.3 (33)	1.8 (45)
C	0.8 (21)	1.2 (31)	1.3 (34)
D	1.5 (38)	1.9 (49)	2.7 (70)
E	1.6 (39)	2.3 (57)	2.5 (63)
F	0.9 (23)	1.1 (29)	1.5 (39)
G	0.9 (23)	1.1 (29)	1.4 (36)
H	3.6 (92)	4.3 (108)	5.4 (137)
I	1.1 (29)	1.4 (35)	1.8 (45)
J	2.3 (58)	2.8 (70)	3.5 (90)
K	0.9 (24)	1.5 (37)	1.8 (47)
L	0.9 (22)	1.1 (27)	1.5 (38)
M	2.4 (60)	3.0 (75)	4.1 (104)
N	1.8 (46)	2.5 (64)	2.7 (69)
O	6.5 (164)	7.8 (197)	9.3 (235)
P	0.8 (21)	1.1 (28)	1.3 (34)
Q	1.3 (34)	1.7 (44)	2.0 (51)
R	1.9 (47)	2.4 (60)	3.3 (85)
S	0.8 (21)	1.1 (27)	1.6 (42)
T	1.1 (27)	1.1 (27)	1.6 (42)
U	0.5 (13)	0.9 (22)	1.1 (27)
V	0.6 (15)	0.9 (22)	1.1 (27)
W	0.3 (8)	0.1 (3)	0.8 (20)
X	0.7 (17)	0.8 (20)	0.8 (20)
Y	0.6 (16)	0.9 (20)	0.8 (20)

Downloadable CAD models available.

MANIFOLD STATION ASSEMBLY

ISO Size	Port Size	Port Location	Model Number *	
			NPT Thread	G Thread
1	3/8	End/Bottom	960N91	D960N91
2	1/2	End/Bottom	962N91	D962N91
3	3/4	End/Bottom	964N91	D964N91

* Includes a manifold assembly, socket head screws, nuts and seals.

Assembled manifolds also available, consult ROSS.


END STATION

ISO Size	Port Size	Model Number *	
		NPT Thread	G Thread
1	3/8	493N86	D493N86
2	1/2	494N86	D494N86
3	1	495N86	D495N86

* Includes left and right end plates, socket head screws, nuts and seals.

DIMENSIONS

Inches (mm)

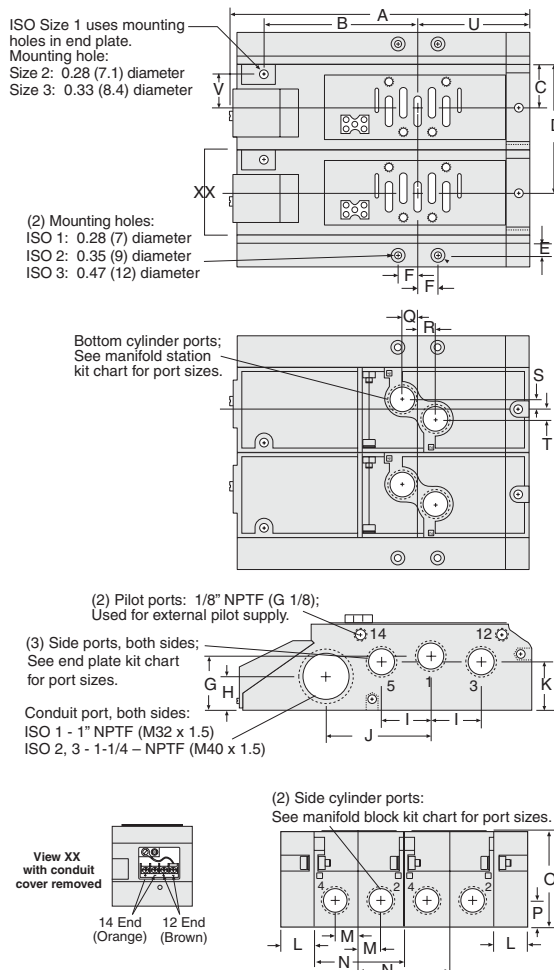

	ISO Size		
	1	2	3
A	7.2 (183)	9.0 (229)	10.6 (270)
B	4.9 (125)	6.0 (152)	7.1 (180)
C	1.0 (26)	1.3 (33)	1.7 (43)
D	3.1 (79)	3.9 (100)	5.1 (128)
E	0.6 (14)	0.6 (16)	0.6 (15)
F	0.6 (14)	0.7 (17)	1.0 (26)
G	1.3 (34)	1.7 (42)	1.8 (46)
H	1.0 (25)	1.2 (30)	1.2 (31)
I	1.1 (28)	1.4 (35)	2.1 (52)
J	2.5 (64)	3.1 (79)	4.1 (104)
K	1.2 (31)	1.6 (40)	1.7 (42)
L	0.9 (22)	1.0 (25)	1.2 (30)
M	0.5 (13)	0.6 (16)	0.8 (21)
N	2.1 (53)	2.6 (67)	3.4 (86)
O	2.2 (55)	2.6 (66)	3.1 (78)
P	0.6 (16)	0.9 (22)	0.8 (20)
Q	0.5 (13)	0.6 (15)	0.7 (18)
R	0.5 (13)	0.6 (15)	0.8 (21)
S	0.3 (7)	0.3 (8)	0.5 (13)
T	0.3 (7)	0.3 (8)	0.5 (12)
U	2.0 (51)	2.8 (67)	3.1 (79)
V	-----	1.0 (26)	1.3 (31)

Downloadable CAD models available.

Manifold Accessories



NOTE: Accessories from this page are to be used only with sub-bases and manifolds on page 16 & 17.

INTERPOSED PRESSURE REGULATORS


ISO Size	Type	Model Number	Dimensions inches (mm)											
			A	B	C	D	E	F	G	H	I	J	K	L
1	Single	965N91	1.6 (39)	1.8 (45)	0.9 (23)	1.7 (43)	0.9 (22)	2.5 (63)	6.2 (157)	7.2 (182)	8.0 (204)	11.6 (295)	13.6 (345)	9.0 (229)
	Double	966N91	1.6 (39)	1.8 (45)	0.9 (23)	1.7 (43)	0.9 (22)	2.5 (63)	6.2 (157)	7.2 (182)	8.0 (204)	11.6 (295)	13.6 (345)	9.0 (229)
2	Single	967N91	1.6 (39)	1.8 (45)	0.9 (23)	2.0 (51)	1.0 (26)	2.5 (63)	6.5 (166)	7.5 (191)	9.0 (229)	12.6 (320)	14.6 (370)	10.0 (254)
	Double	968N91	1.6 (39)	1.8 (45)	0.9 (23)	2.0 (51)	1.0 (26)	2.5 (63)	6.5 (166)	7.5 (191)	9.0 (229)	12.6 (320)	14.6 (370)	10.0 (254)
3	Single	969N91	2.1 (52)	2.7 (67)	1.3 (34)	2.6 (66)	1.3 (33)	3.4 (85)	9.5 (242)	8.0 (203)	10.6 (270)	18.2 (463)	15.2 (386)	13.0 (330)
	Double	970N91	2.1 (52)	2.7 (67)	1.3 (34)	2.6 (66)	1.3 (33)	3.4 (85)	9.5 (242)	8.0 (203)	10.6 (270)	18.2 (463)	15.2 (386)	13.0 (330)

The interposed regulator controls the pressure through the base-mounted valve. These interposed devices are “sandwich” style, mounting between a valve and base or manifold. When using a dual interposed regulator for a W65 Series solenoid valve, the valve must be externally piloted (port 14).

Single Interposed Regulator
(top view)

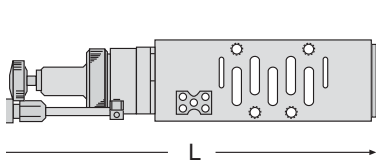


Double Interposed Regulator
(top view)

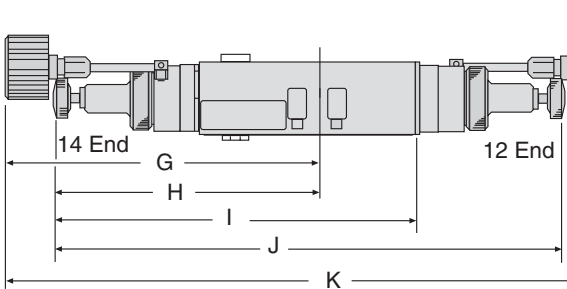

WARNING: Double interposed regulators will reverse output ports, the 12 solenoid will pressurize the 4 port, the 14 solenoid will pressurize the 2 port which may cause unexpected, potentially dangerous cylinder movement at valve pressurization.

INTERPOSED FLOW CONTROL


ISO Size	Model Number	Dimensions inches (mm)		
		A	B	C
1	1371N77	0.9 (24)	3.8 (97)	1.7 (43)
2	1372N77	1.3 (33)	5.1 (130)	2.0 (51)
3	1373N77	1.6 (41)	5.6 (142)	2.6 (66)



The interposed flow control independently adjusts the speed of a cylinder’s extend and retract motions. This action is achieved by throttling the flow of exhaust air through ports 3 and 5 by means of a separate needle valve across each of these ports. These interposed devices are “sandwich” style, mounting between a valve and a base or manifold.

BLANK STATION PLATES

Blank Station Plate	ISO Size	Model Number
	1	1381N77
	2	1382N77
	3	1383N77
A blank station plate is used to cover the top of a manifold station not in use.		



NOTE: Accessories from this page are to be used only with sub-bases and manifolds on page 16 & 17.

Manifold Accessories

NOTE: Accessories from this page are to be used only with sub-bases and manifolds on page 16 & 17.

PORT BLOCKING DISKS

Port Blocking Disks	ISO Size	Model Number *	
	1	1376N77	
	2	1378N77	
	3	1380N77	
	* A blocking disk closes the ports between manifold stations.		

PILOT PORT BLOCKING PLUGS

Pilot Port Blocking Plugs	ISO Size	Model Number *	
	1	1375N77	
	2	1377N77	
	3	1379N77	
	* The pilot blocking plug blocks the pilot ports between manifold stations.		

MANIFOLD TRANSITION PLATES

Manifold Transition Plates	Left Manifold ISO Size	Right Manifold ISO Size	Model Number *
	1	2	1387N77
	2	1	1388N77
	2	3	1389N77
	3	2	1390N77
	* To bank different manifold sizes together.		

EXHAUST SILENCERS

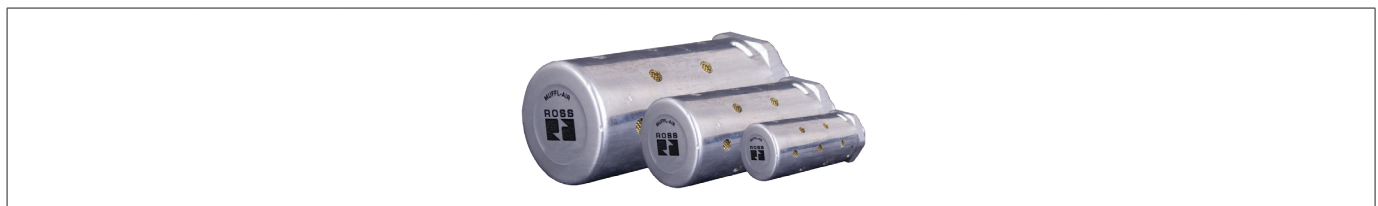


Illustration example.

Silencers	SPECIFICATIONS		Silencer Material		Pressure Range psig (bar)		Schematic	
			Aluminum		0-290 (0-20) maximum			
	Port Size	Thread Type	Flow C _v (NI/min)	Model Number		Dimensions inches (mm)		Weight ≈ lb (kg)
				NPT Thread	R/Rp Thread	Length	Hex Size (D)	
	1/4	Male	2.3 (2300)	5500A2003	D5500A2003	2.2 (6)	0.81 (21)	0.07 (0.03)
	3/8	Male	2.9 (2900)	5500A3013	D5500A3013	2.2 (6)	0.81 (21)	0.07 (0.03)
	1/2	Male	6.8 (6700)	5500A4003	D5500A4003	3.6 (9)	1.25 (32)	0.2 (0.1)
	1	Male	18 (18000)	5500A6003	D5500A6003	5.4 (14)	2.0 (51)	0.9 (0.4)

NOTE: Accessories from this page are to be used only with sub-bases and manifolds on page 16 & 17.

Manifold Bases

MANIFOLD BASES FOR ISO SIZE 1 & 2

MANIFOLD MODEL NUMBER CONFIGURATOR

RPSHU11

5

5

J

1


P

ISO 1 & 2

ISO Size	Port Size	Thread Type	
ISO Size 1	3/8	NPT	5
		G	6
ISO Size 2	1/2	NPT	7
		G	8

Circuit Board Address Configuration	
Interconnect, Single Address	J
Interconnect, Double Address	M

Gasket Options	
1, 3, 5 Ports Open and Pilots Open	1
1, 3, 5 Ports Closed and Pilots Open	2
1 Port Closed, 3, 5 Ports Open and Pilots Closed	3
1 Port Open, 3, 5 Ports Closed and Pilots Open	4
1, 3, 5 Ports Open and Pilots Closed	5
1, 3, 5 Ports Closed and Pilots Closed	6
1 Port Closed, 3, 5 Ports Open and Pilots Closed	7
1 Port Open, 3, 5 Ports Closed and Pilots Open	8



MANIFOLD BASES FOR ISO SIZE 3

MANIFOLD MODEL NUMBER CONFIGURATOR

RPS4211

69

M

C

P

Basic Series

Mounting Base Style	Port Size	Thread Type	
Bottom / End Port	3/8	NPT	69
		G	60

Enclosures / Lead Length	
Circuit Board, Single Address	J †
Circuit Board, Double Address	M †
† Not Available with Sub-Base Kits.	

Note: When using the Enclosure / Lead Length “J” or “M” option:

12 volts DC - Maximum number of coils is 13

24 volts DC - Maximum number of coils is 21

120 volts AC - Coils limited by the number of pins available in the connector (25-Pin D-Sub = 24 coils, 19-Pin Brad Harrison = 16, 12-Pin M23 = 8)

240 volts AC- Must use “A” or “C” Option, Lead Wires or Terminal Blocks

End Stations

END STATIONS FOR ISO SIZE 1 & 2

END STATION MODEL NUMBER CONFIGURATOR

RPSHU20

L2

1

0

P

Valve Type		
Non Plug-in	Internal Pilot	RPSHU20
	External Pilot	RPSHU2X

Left Hand End Station Type	
25-Pin-D-Sub (top)#	L2
Industrial Communication	
ROSS Serial Bus	L6^
Turck BL67 with Valve Driver Module - For 16 Outputs	T1*
Turck BL67 with Valve Driver Module - For 32 Outputs	T2*

RPSHU11 gaskets included in each end station kit.

^ Valve Driver Module and 24 Output Cable installed. Must order communication modules separately. Must Order Bases with Circuit Boards.

* Turck Network and P2M Ethernet node communication module ordered separately.


Thread Type	
NPT	0
G	1*

* G thread model conforms to ISO 1179-1 w 228-1 thread.

Right Hand End Station Ports	
1/2 Exhaust and Inlet Ports	1
3/4 Exhaust and Inlet Ports	2



Left Hand End Station
25-pin D-Sub (top)



Hi-Flow Right Hand End Station

End Plate Type	Port Size	Flow C _v (NI/min)
Right Hand	1/2	6.1 (5900)
	3/4	8.35 (6200)

END STATIONS FOR ISO SIZE 3

END STATION MODEL NUMBER CONFIGURATOR

RPS42

20

L2

0

C

P

Basic Series

Revision Level

Options	
25-Pin, D-Sub	L2†+
Industrial Communication	
ROSS Serial Bus Communication	L6^+
16 Outputs - Turck Serial Bus Communication Module	T1*
32 Outputs - Turck Serial Bus Communication Module	T2*

† Only Available with End Station Kit Type "20".


RPSHU11 gaskets included in each end plate kit.

^ Valve Driver Module and 24 Output Cable Installed. Must order communication modules separately.

+ Must Order Bases with Circuit Boards.

* Turck Network and P2M Ethernet node communication module ordered separately.

Thread Type	
NPT	0
G	1

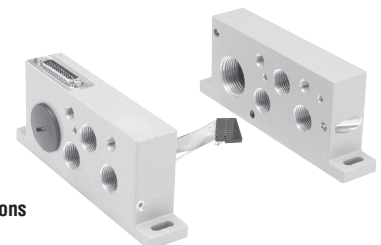

25-Pin D-Sub End Stations

Manifold Accessories

BLANK STATION PLATE KITS

Blank Station Plates	ISO Size	Model Number *	
	1	RPS4034CP	
	2	RPS4134CP	
	3	RPS4234CP	
	* Includes: Blank Station Plate, Gasket, and Mounting Bolts.		

REMOTE PILOT ACCESS PLATE KITS

Remote Pilot Access Plates	ISO Size	Port Size	Model Number *	
			NPT Thread	G Thread
	1	1/8	RPS401500CP	RPS401501CP
	2	1/8	RPS411500CP	RPS411501CP
	3	1/8	RPS421500CP	RPS421501CP
	* Includes: Pilot Port Access Plate, Gasket and Mounting Studs.			

GASKET KITS FOR ISO SIZE 1 & 2 MANIFOLD TO MANIFOLD

Gasket Kits Manifold to Manifold	Pilots Status	Diagram Reference	Description	Kit Number
	Pilots Opened	1	Supply & Exhaust & Pilots Open	RPSHU11P
		2	Supply Closed, Exhaust & Pilots Open	RPSHU12P
		3	Supply & Exhaust Closed, Pilots Open	RPSHU13P
		4	Supply & Pilots Open, Exhaust Closed	RPSHU14P
	Pilots Blocked	5	Supply & Exhaust Open, Pilots Closed	RPSHU15P
		6	Supply & Pilots Closed, Exhaust Open	RPSHU16P
		7	Supply & Exhaust & Pilots Closed	RPSHU17P
		8	Supply Open, Exhaust & Pilots Closed	RPSHU18P



1 – Supply & Exhaust & Pilots Open



3 – Supply & Exhaust Closed, Pilots Open



5 – Supply & Exhaust Open, Pilots Closed



7 – Supply & Exhaust & Pilots Closed



2 – Supply Closed, Exhaust & Pilots Open



4 – Supply & Pilots Open, Exhaust Closed



6 – Supply & Pilots Closed, Exhaust Open



8 – Supply Open, Exhaust & Pilots Closed

INTERPOSED PRESSURE REGULATORS

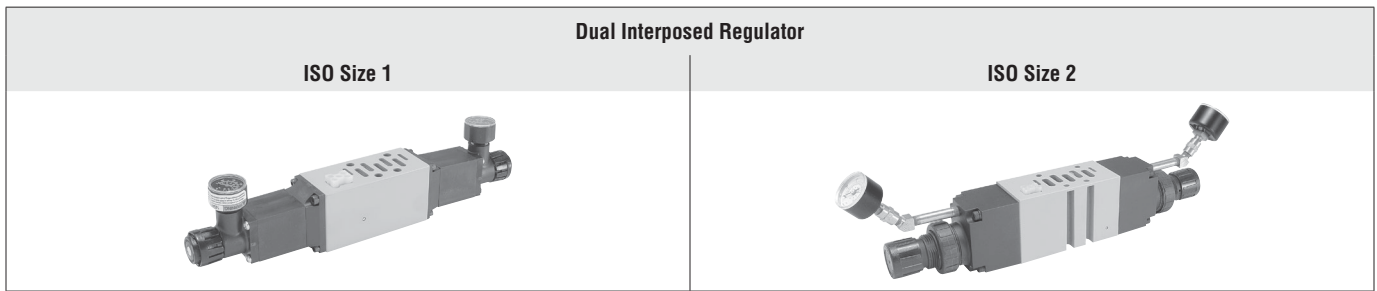


Illustration examples.

INTERPOSED REGULATOR NUMBER CONFIGURATOR

RPS4038

1

6

6

C

P

Basic Series/ISO Size

ISO Size 1	RPS4038
ISO Size 2	RPS4138
ISO Size 3	RPS4238

Regulator Function

Common Pressure Regulator	1
Independent Pressure Regulator	2
Selector Regulator	3

#4 Port Regulator / Gauge*

Line By-Pass Plate	0**
1-30 psig w/o Gauge	1
2-60 psig w/o Gauge	2
5-125 psig w/o Gauge	3
1-30 psig w/Gauge	4
2-60 psig w/Gauge	5
5-125 psig w/Gauge	6
Air Pilot w/60 psig Gauge	C
Air Pilot w/160 psig Gauge	D

* For Common Pressure Regulator Option, Regulator Gauge callout must be the same number for both Port #4 and Port #2. (Example: 166)

** Pressure Line By-Pass Option can only be used with Independent and Selector Regulators (Option 2 & 3 in Interposed Block Function).

#2 Port Regulator / Gauge *

Line By-Pass Plate	0**
1-30 psig w/o Gauge	1
2-60 psig w/o Gauge	2
5-125 psig w/o Gauge	3
1-30 psig w/Gauge	4
2-60 psig w/Gauge	5
5-125 psig w/Gauge	6
Air Pilot w/60 psig Gauge	C
Air Pilot w/160 psig Gauge	D

* For Common Pressure Regulator Option, Regulator Gauge callout must be the same number for both Port #4 and Port #2. (Example: 166)

** Pressure Line By-Pass Option can only be used with Independent and Selector Regulators (Option 2 & 3 in Interposed Block Function).

Ordering Components

- Manifold Base or Sub-Base Kit required
- Interposed Regulator Kit configured for Internal Pilot as standard
- Order valve as External Pilot

How to Configure Interposed Regulator / Valve Combinations

Internal Pilot Configuration - Pressure in Base Port 1 feeds regulator configured for Internal Pilot which feeds valve configured for External Pilot.

External Pilot Configuration - Size 1, Size 2, Size 3

An External Pilot pressure in Port 12 or 14 of the base feeds thru the Interposed Regulator 12 or 14 galley directly to the 12/14 pilot of the valve. This configuration takes an External Pilot from the 12 port of the base and passes it thru the regulator to feed the 12 galley of the valve.

WARNING: Double interposed regulators will reverse output ports, the 12 solenoid will pressurize the 4 port, the 14 solenoid will pressurize the 2 port which may cause unexpected, potentially dangerous cylinder movement at valve pressurization.

Manifold Accessories

INTERPOSED FLOW CONTROLS

Interposed Flow Controls	Description	ISO Size	Model Number
	Both adjustment screws are located on the 12 end of the unit. Interposed Flow Control mounts with its own studs, which means the valve uses standard bolts for mounting. Interposed Flow Control is not to be used as a shut off device and is not bubble tight when needles are fully turned down.	1	RPS4035CP
		2	RPS4135CP
		3	RPS4235CP
	An Interposed Flow Control and Common Port Interposed Regulator may be sandwiched together on a Manifold or Sub-Base. The Interposed Flow Control MUST be located between the manifold/Sub-Base and the Common Port Interposed Regulator.		

GAUGE ADAPTER KITS

Gauge Adapter	Description	Model Number	
	Gauge Adapter Kit	RPS5651160P	
	1/8" Female to 1/8" Female Coupling	R207P-2*	
	1/8" Male to 1/8" Male Long Nipple	RVS215PNL-2-15*	
	* Included in Gauge Adapter RPS5651160P.		

EXHAUST SILENCERS


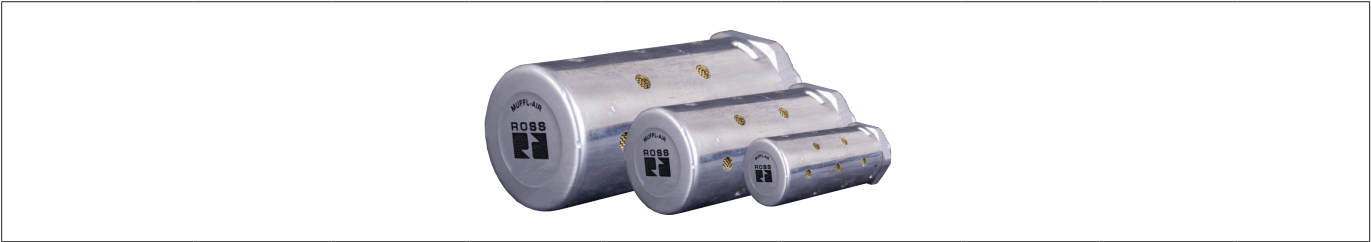


Illustration example.

Silencers	SPECIFICATIONS		Silencer Material		Pressure Range psig (bar)		Schematic	
			Aluminum		0-290 (0-20) maximum			
	Port Size	Thread Type	Flow C _v (NI/min)	Model Number		Dimensions inches (mm)		Weight ≈ lb (kg)
				NPT Thread	R/Rp Thread	Length	Hex Size (D)	
	3/8	Male	2.9 (2900)	5500A3013	D5500A3013	2.2 (6)	0.81 (21)	0.07 (0.03)
	1/2	Male	6.8 (6700)	5500A4003	D5500A4003	3.6 (9)	1.25 (32)	0.2 (0.1)
3/4	Male	7.2 (7100)	5500A5013	D5500A5013	3.6 (9)	1.25 (32)	0.2 (0.1)	

CAUTIONS, WARNINGS And STANDARD WARRANTY



ROSS OPERATING VALVE, ROSS CONTROLS®, ROSS DECCO®, and AUTOMATIC VALVE INDUSTRIAL, collectively the “ROSS Group”.

PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure all sources of energy are turned off, the entire pneumatic system is shut down and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).
2. All ROSS Group Products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any product can be tampered with and/or need servicing after installation, persons responsible for the safety of others or the care of equipment must check ROSS Group Products on a regular basis and perform all necessary maintenance to ensure safe operating conditions.
3. All applicable instructions should be read and complied with before using any fluid power system to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS Group location.
4. Each ROSS Group Product should be used within its specification limits. In addition, use only ROSS Group components to repair ROSS Group Products.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

FILTRATION and LUBRICATION

1. Dirt, scale, moisture, etc., are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. The ROSS Group recommends a filter with a 5-micron rating for normal applications.
2. All standard ROSS Group filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition and hazardous leakage. Immediately replace crazed, cracked, or deteriorated bowls.
3. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum base oils with oxidation inhibitors, an aniline point between 180°F (82°C) and 220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with

phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks personal injury, and/or damage to property.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

AVOID INTAKE/EXHAUST RESTRICTION

1. Do not restrict air flow in the supply line. To do so could reduce the pressure of the supply air below minimum requirements for the valve and thereby causing erratic action.
2. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

WARNINGS: Failure to follow these instructions can result in personal injury and/or property damage.

SAFETY APPLICATIONS

1. Mechanical Power Presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
2. Safe Exhaust (dump) valves without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All Safe Exhaust valve installations should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.
3. Per specifications and regulations, the ROSS L-O-X® and L-O-X® with EEZ-ON®, N06 and N16 Series operation products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

WARNINGS:

Failure to follow these instructions can result in personal injury and/or property damage.

STANDARD WARRANTY

All products sold by the ROSS Group are warranted for a one-year period [with the exception of Filters, Regulators and Lubricators (“FRLs”) which are warranted for a period of seven (7) years] from the date of purchase. All products are, during their respective warranty periods, warranted to be free of defects in material and workmanship. The ROSS Group's obligation under this warranty is limited to repair, replacement or refund of the purchase price paid for products which the ROSS Group has determined, in its sole discretion, are defective. All warranties become void if a product has been subject to misuse, misapplication, improper maintenance, modification or tampering. Products for which warranty protection is sought must be returned to the ROSS Group freight prepaid.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND THE ROSS GROUP EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE ROSS GROUP MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS THE ROSS GROUP LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF THE ROSS GROUP MAY EXTEND THE LIABILITY OF THE ROSS GROUP AS SET FORTH HEREIN.



GLOBAL LOCATIONS

	AMERICAS	USA	ROSS CONTROLS	Tel: +1-248-764-1800	www.rosscontrols.com
		Canada	ROSS CANADA	Tel: +1-416-251-7677	www.rosscanada.com
		Brazil	ROSS BRASIL	Tel: +55-11-4335-2200	www.rosscontrols.com.br
	EUROPE	Germany	ROSS EUROPA	Tel: +49 (0)6103-7597-100	www.rosseuropa.com
		France	ROSS FRANCE	Tel: +33(0)1-49-45-65-65	www.rossfrance.com
		United Kingdom	ROSS UK	Tel: +44 (0)1254 872277	www.rossuk.co.uk
	ASIA & PACIFIC	India	ROSS CONTROLS INDIA	Tel: +91-44-2624-9040	www.rosscontrolsindia.com
		China	ROSS CONTROLS CHINA	Tel: +86-21-6915-7961	www.rosscontrolschina.com
		Japan	ROSS ASIA	Tel: +81-42-778-7251	www.rossasia.co.jp



www.automaticvalve.com



www.rossdecco.com



www.manufactis.net



www.masterpneumatic.com



www.pneumatrol.com



www.ubsafe.com